
Memory emulation

Emulation memory Processor specific

Measured data
memory Processor specific

Host interface

Serial interface 100 Mbit/s

Double shielded line, max. 30 m/100 ft


Electrically isolated

Operation temperature

Temperature range -40 °C to +110 °C / -40 °F to +230 °F

This product has been developed and released for use in automotive applications. For usage in other domains please contact your ETAS representative.

Ordering Information

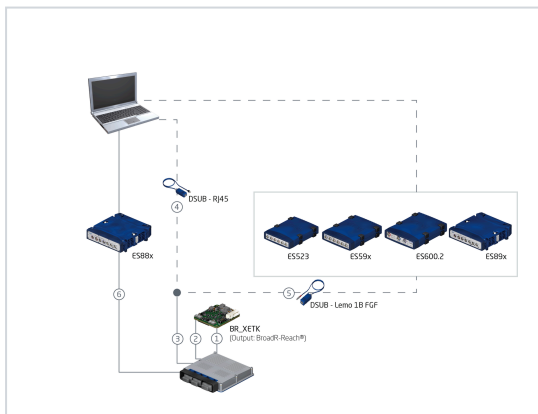

1 – ECU Connection

2 – Automotive Ethernet Connection


3 – Automotive Ethernet Connection

4 – Media Converter (PC Connection)

5 – Media Converter (ES523, ES59x, ES600, ES89x, ES910 Connection)

6 – Ethernet Connection with ES88x

Order Name	Short Name	Order Number
BR_XETK-S4		
BR_XETK-S4.0B ECU interface for the STMicroelectronics STELLAR SR6 microcontroller family (including gap pad)	BR_XETK-S4.0B	F-00K-113-468

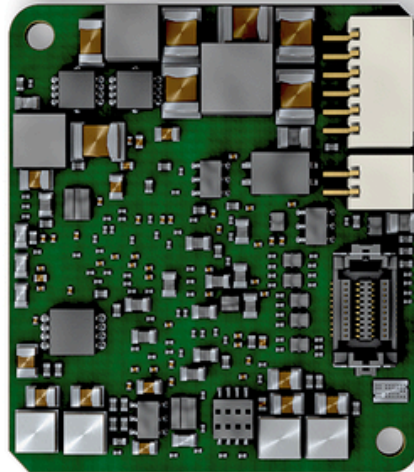

Optional Accessories for BR_XETK-S4

1 – ECU Connection


ETAM2 ETK ECU Adapter, MOLEX - open wires (6fc - 6c), 0m25	ETAM2	F-00K-109-306
--	-------	---------------



ETAM5 FETK ECU Adapter, MOLEX - MOLEX (6fc - 5fc+1c), 0m136	ETAM5	F-00K-110-101
---	-------	---------------



ETAM8A BR_XETK-S3/S4 ECU Adapter, FCI - SAMTEC SFM (20c - 10fc), 0m11 ETAM8A F-00K-110-754




2 - Automotive Ethernet Connection


ETABR1 Automotive Ethernet interface cable, MOLEX à open wires (ECU), 0,3m (2fc - 2c) Single wires which need to be twisted while mounting ETABR1 F-00K-109-771



ETABR2 Automotive Ethernet interface cable, MOLEX à MOLEX (ECU), 0,17m (2fc - 2c) ETABR2 F-00K-111-118




ETABR3 Automotive Ethernet Interface Cable, MOLEX - open wire (2fc-2c), 0m33 ETABR3 F-00K-111-964



CBAM290 Automotive Ethernet interface cable, pre-assembled into M10 screwing, shield on ECU-Housing MOLEX à Lemo, 0,60m (2fc - 2c) CBAM290.1-0m6 F-00K-111-117




BR_XETK ECU Adapter and Power Supply Cable, pre-assembled into M12 screwing, shield on ECU housing, Lemo 1B PHA - MOLEX (2fc-2fc) / Lemo 1B PHG - open wire (2fc-1c), 0m6 CBAM295.1-0m6 F-00K-111-656

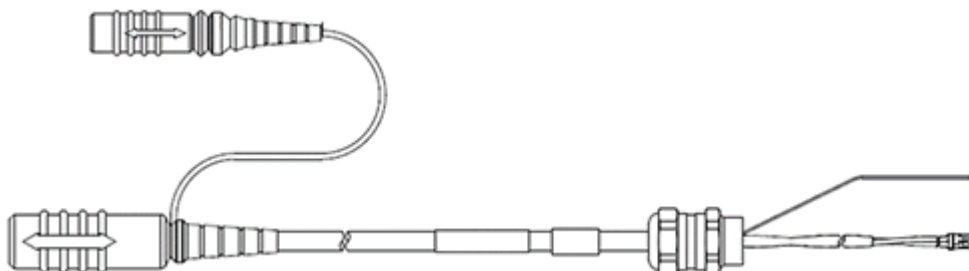

BR_XETK ECU Adapter and Power Supply Cable, pre-assembled into M12 screwing, shield on ECU housing, Lemo 1B PHA - MOLEX (2fc-2fc) / Lemo 1B PHG - open wire (2fc-1c), 1m8

CBAM295.1-1m8 F-00K-111-657

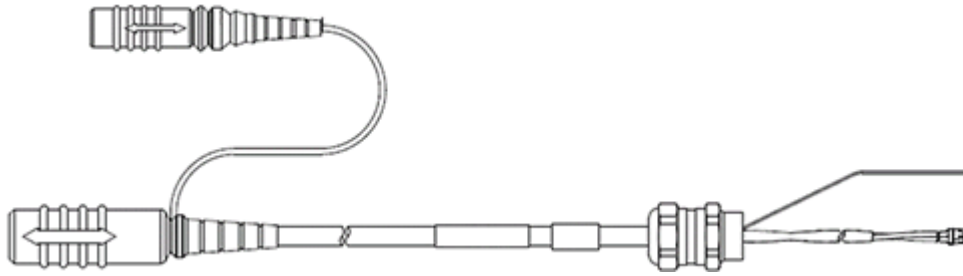

3 - Automotive Ethernet Connection

4 - Media Converter (PC Connection)

Media Converter Cable, DSUB - RJ45 (9mc-8mc), 1m

CBEB100.1-1m0

F-00K-110-094



5 - Media Converter (ES523, ES59x, ES600, ES89x, ES910 Connection) [1]

ES165.1 Media Converter (1xAE) with Lemo connector

ES165.1

F-00K-112-184



6 - Ethernet Connection to ES88x

Automotive Ethernet Splitter Cable 100 Mbit/s,
Yamaichi YCP - 4x DSUB (8mc - 4x 9mc), 0m4


CBEB242.1-0m4

F-00K-111-123

Mechanical Accessories


Gap pad as spare part for BR_XETK-S3/S4

BR_XETK-S3_GP F-00K-110-752

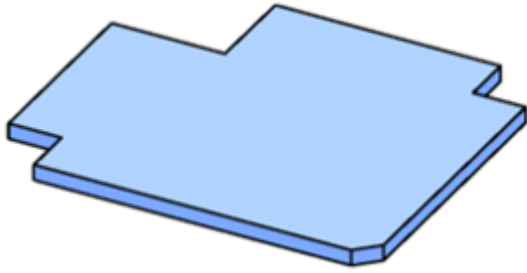

Mounting bracket for BR_XETK-S3/S4

BR_XETK-S3_MB F-00K-110-753

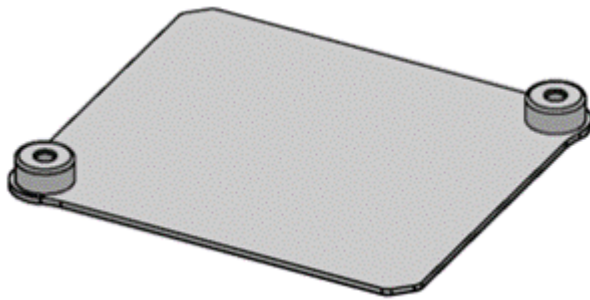

[1] You can find the suitable adapter cable for the Media Converter to your BR_XETK on the [ES16x Ordering Information page](#).

Note: This list contains only a selection of available adapters. A comprehensive overview is available in the User Guide of each ETK.

