


# FETK-T1.1 – Fast ECU Interfaces

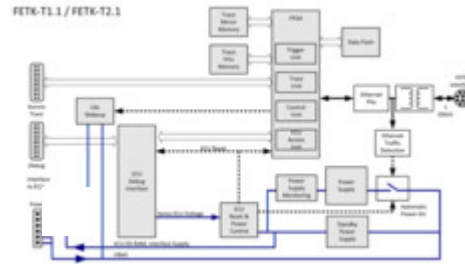

## CPU interface

Supported processors

Infineon Aurix Family (TC2xx and TC3xx)

For a complete list of supported microprocessors, please refer to the product's User's Guide.

Configuration

Project-specific configuration for memory configurations stored in EEPROM

## Board

Dimensions (LxWxH)

60 x 45,25 x 12<sup>1</sup> mm / 2,362 x 1,781 x 0,472<sup>1</sup> in  
 60 x 45,25 x 14,9<sup>2</sup> mm / 2,362 x 1,781 x 0,587<sup>2</sup> in

(Note 1: Height does not include an adapter connector)  
 (Note 2: Height includes a cable ETAM2 mounted at the CON2 connector)

Power supply

Input voltage

6,6 V to 32 V

Cranking voltage < 3 sec: 3V

Input current at 12 V    Approx. 240 mA normal operation

---

Approx. 106 mA normal standby

---

Approx. 3 mA deep standby

---

Memory emulation

---

Emulation memory    Processor specific

---

Measured data  
memory                Processor specific

---

Host interface

---

Connection            1 Gbit/s Ethernet

---

Cable length            max. 30 m/100 ft

---

Ethernet interface    DC decoupling

---

Operation temperature


---

Temperature range    -40 °C to +110 °C / -40 °F to +230 °F

---


This product has been developed and released for use in automotive applications. For usage in other domains please contact your ETAS representative.

## Ordering Information

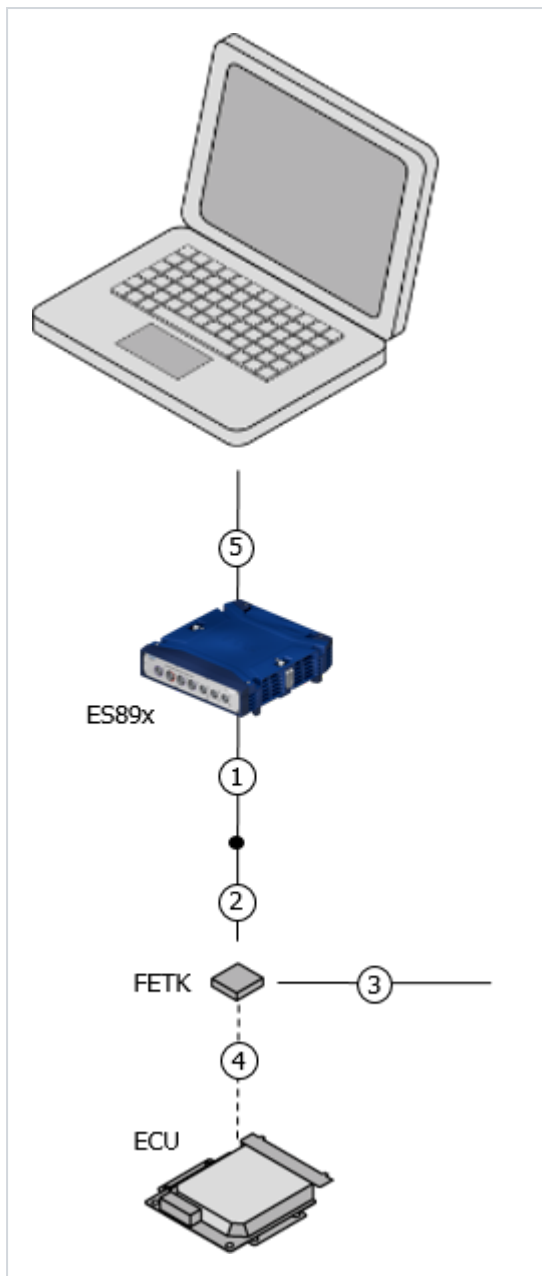

- 1 – ES89x Interface Cable
- 2 – ECU Adapter Cables
- 3 – Power Supply Cables
- 4 – FETK - ECU Adapter
- 5 – Ethernet PC Connection


Order Name	Short Name	Order Number
FETK-T1.1		
Emulator Probe for the Infineon TC2xx AURIX microcontroller family, ECU adaption via 10 pin SAMTEC, 20 pin SAMTEC and 6 pin MOLEX plug, with further adapter	FETK-T1.1A	F-00K-110-882

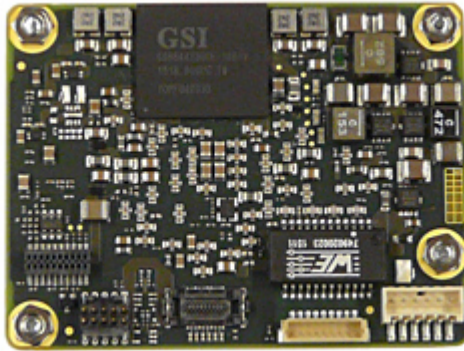

Emulator Probe for the Infineon TC3xx AURIX microcontroller family, ECU adaption via 10 pin SAMTEC, 20 pin SAMTEC and 6 pin MOLEX plug, with further adapter

FETK-T11B

F-00K-111-265

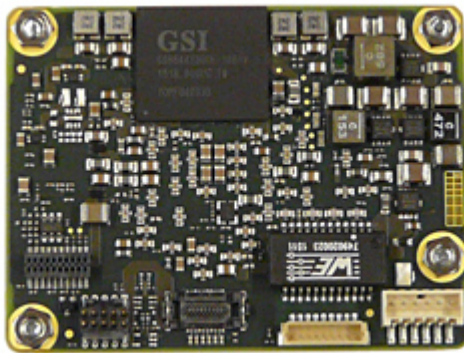


Optional Accessories

### 1 - ES89x Interface Cable

1 GBit/s Ethernet Connection and Power Supply Cable, Lemo 1B FGM - Lemo 1B FGH (10fc-10mc), 3 m

CBE260.1-3


F-00K-109-446



1 GBit/s Ethernet Connection and Power Supply Cable, Lemo 1B FGM - Lemo 1B FGH (10fc-10mc), 8 m

CBE260.1-8

F-00K-109-447



### 2 - ECU Adapter Cable

FETK ECU Adapter Cable, pre-assembled into PG9 screwing, shield on ECU Housing, Lemo 1B PHM - JST CBAM300.3-0m6 F-00K-112-469 SHR (10mc-9fc), 0m60



FETK ECU Adapter Cable, shield on ECU-Housing, Lemo 1B PHM - JST SHR (10mc-9fc), 0m60 CBAM340.1-0m6 F-00K-109-302




### 2&3 - Combined ECU Adapter and Power Supply Cable

FETK ECU Adapter and Power Supply Cable, pre-assembled into PG9 screwing, shield on ECU-Housing, Lemo 1B PHM - JST SHR (10mc-9fc) / Lemo 0B PHG - open wire (2fc-1c), 0m60 CBAM305.1-0m6 F-00K-109-297



### 3 - Power Supply Cables

External Power Supply Cable for ETKs, Lemo 0B - FGG open wires (2fc-1c), 2 m K70.1 F-00K-109-270



ETK Power Supply Cable for External Supply, with Filter Coil, Lemo 0B EGG - open wire (2fc-1c), 0m2 KA50 F-00K-000-940



### 4 - FETK - ECU Adapter

ETAM2 ETK ECU Adapter, MOLEX - open wires (6fc - 6c), 0m25 ETAM2 F-00K-109-306



ETAM4 FETK Trace ECU Adapter, SAMTEC SSH - SAMTEC STH (20fc - 20mc), 0m17

ETAM4

F-00K-109-979



ETAM5 FETK ECU Adapter, MOLEX - MOLEX (6fc - 5fc+1c), 0m136

ETAM5


F-00K-110-101



ETAM8B BR\_XETK-S3 ECU Adapter, FCI - SAMTEC SFM (20c - 10fc), 0m11

ETAM8B

F-00K-110-881



## 5 – Ethernet PC Connection

Further information on the Ethernet PC Connection, can be found on the [cable page Ethernet Connection](#).

Note: This list contains only a selection of available adapters. A comprehensive overview is available in the User Guide of each ETK.

